

FOCUS PLUS SERIE



ECOLOGICAL
KULDEMEDIUM R32




ASH-09BIF2
ASH-13BIF2
ASH-18BIF2
ASH-24BIF2

- Elegant design
- Energi klasse A++
- Syv hastigheter på vifte
- Varme 8°C
- Wifi
- Varmepumpedrift ned til -22°C
- Horisontal og vertikal luft retning
- Fjernkontroll kan brukes som temp. referanse (I feel)



PLASMA+TEC DC INVERTER

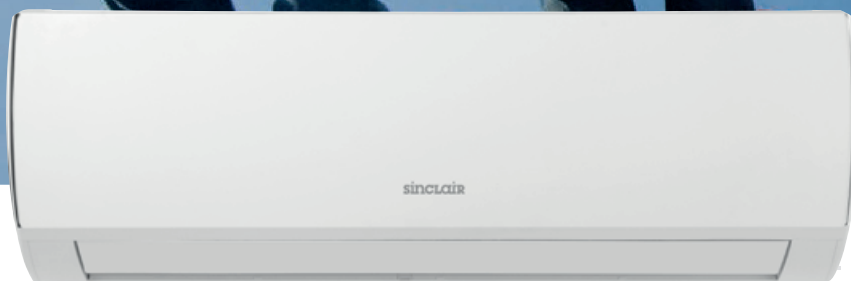

STANDARD UTSTYR

- Filter - catechin SAF-OPWC4 OG biological filter SAF-OPWB4
- Cold plasma generator
- WiFi module
- Pot free av/på

MODELL			ASH-09BIF2	ASH-13BIF2	ASH-18BIF2	ASH-24BIF2
Kapasitet kjøling / varme	kW		2,7 (0,5-3,5) / 2,8 (0,5-4,2)	3,5 (0,7-4,0) / 3,7 (0,8-4,5)	5,2 (1,3-6,6) / 5,3 (1,2-6,8)	7,0 (2,0-8,9) / 7,4 (1,8-10,7)
Tilførsel	Hz / V		1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
SEER / SCOP	-		6,8 / 4,0	7,0 / 4,0	7,0 / 4,0	6,5 / 4,0
Energi klasse	-		A++	A++	A++	A++
Lydnivå 1m	ID	dB(A)	41 / 37 / 35 / 32 / 29 / 26 / 24	42 / 38 / 35 / 32 / 30 / 28 / 26	45 / 43 / 41 / 38 / 35 / 34 / 31	48 / 45 / 42 / 39 / 37 / 36 / 33
	UD	dB(A)	50	52	57	57
Dimensjon (b x h x d) vekt	ID	mm/kg	790 x 275 x 200 / 9,0	845 x 289 x 209 / 10,5	970 x 300 x 224 / 13,5	1078 x 325 x 246 / 16,5
	UD	mm/kg	782 x 540 x 320 / 27,5	848 x 596 x 320 / 31,0	963 x 700 x 396 / 45,0	963 x 700 x 396 / 53,5
Driftsområde kjøling / varme	°C		-15~43 / -22~24	-15~43 / -22~24	-15~43 / -22~24	-15~43 / -22~24

ID/UD= innedel / utedel

Contains fluorinated greenhouse gases covered by the Kyoto Protocol. R32 (single component refrigerant HFC), GWP of refrigerant used: 675.

TILLEGGSUTSTYR

- Helse filter
- GSM modul G2S
- Fastmontert kontrollert SWC-02, XK19
- Alarm interface SAI-01



Aircondition og varmepumper

NÆRING OG PRIVAT

www.energi-1.no

