


UNI SPLITT

SERIE



ECOLOGICAL
KULDEMEDIEUM R32

ASD-XXBI

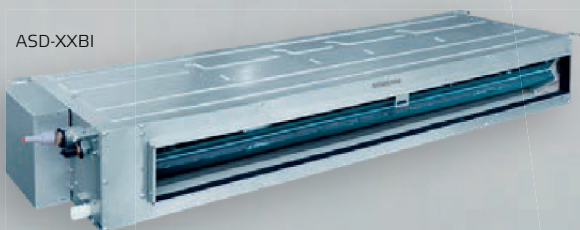

ASD-12BI ASD-36BI
ASD-18BI ASD-42BI
ASD-24BI ASD-48BI
ASD-30BI ASD-60BI

- Autorestart
- Pot free kontakt på / av Vann pumpe
- Tillegg WiFi



DC INVERTER

ASGE-XXBI-3



ASGE-XXBI

MODELL			ASGE-12BI ASD-12BI	ASGE-18BI ASD-18BI	ASGE-24BI ASD-24BI	ASGE-30BI ASD-30BI	ASGE-36BI ASD-36BI
Kapasitet kjøling / varme	kW		3,5 / 4,0	5,0 / 5,5	7,0 / 8,0	8,5 / 8,8	10,0 / 12,0
Tilførsel utedel	Hz / V		1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
SEER / SCOP	-		6,1 / 4,0	6,1 / 4,0	6,8 / 4,0	6,1 / 4,0	6,1 / 4,0
Energi klasse kjøling / varme	-		A++ / A+	A++ / A+	A++ / A+	A++ / A+	A++ / A+
Lydnivå innedel 1,4m	dB(A)		41 / 38 / 36 / 34	43 / 42 / 39 / 36	40 / 39 / 37 / 36	42 / 40 / 37 / 35	46 / 44 / 42 / 40
Lydnivå utedel 1m	dB(A)		50	50	52	53	55
Dimensjon (b x h x d) vekt	ID	mm/kg	700x200x450 / 20	1000x200x450 / 26	1300x220x450 / 31	1300x220x450 / 31	1000x300x700 / 41
	UD	mm/kg	818x596x378 / 37	818x596x378 / 39	892x698x396 / 53	920x790x427 / 60	940x820x530 / 83
Driftstemperatut kjøling / varme	°C		-20~48 / -20~24	-20~48 / -20~24	-20~48 / -20~24	-20~48 / -20~24	-20~48 / -20~24

MODELL			ASGE-36BI-3 ASD-36BI	ASGE-42BI-3 ASD-42BI	ASGE-48BI-3 ASD-48BI	ASGE-60BI-3 ASD-60BI	
Kapasitet kjøling / varme	kW		10,0 / 12,0	12,1 / 13,5	13,4 / 15,5	16,0 / 17,0	
Tilførsel utedel	Hz / V		3~ / 50 / 380-415	3~ / 50 / 380-415	3~ / 50 / 380-415	3~ / 50 / 380-415	
SEER / SCOP	-		6,1 / 4,0	5,8 / 3,8	5,4 / 3,7	6,1 / 4,0	
Energi klasse kjøling / varme	-		A++ / A+	A+ / A	A+ / A	A++ / A+	
Lydnivå innedel 1,4m	dB(A)		46 / 44 / 42 / 40	42 / 40 / 39 / 37	43 / 41 / 40 / 38	44 / 41 / 39 / 38	
Lydnivå utedel 1m	dB(A)		55	56	57	57	
Dimensjon (b x h x d) vekt	ID	mm/kg	1000x300x700 / 41	1400x300x700 / 50	1400x300x700 / 50	1400x300x700 / 57	
	OD	mm/kg	940x820x530 / 89	940x820x530 / 95	940x820x530 / 99	900x1345x412 / 112	
Driftstemperatut kjøling / varme	°C		-20~48 / -20~24	-20~48 / -20~24	-20~48 / -20~24	-20~48 / -20~24	

*Tilførsel alle innedeler 1~ / 50 / 220-240.

Contains fluorinated greenhouse gases covered by the Kyoto Protocol. R32 (single component refrigerant HFC), GWP of refrigerant used: 675.